




## High Performance Grade Polypropylene Meltblown Cartridge - GCTB

- Unique & proprietary process delivers superior efficiency, life and economy
- Excellent compatibility with a wide range of chemicals
- Graded density pore structure enhances dirt holding capacity
- Easy cartridge incineration and disposal
- All polypropylene construction
- All end configurations available (glued or thermally-bonded)



### Flow Rate vs Pressure Drop

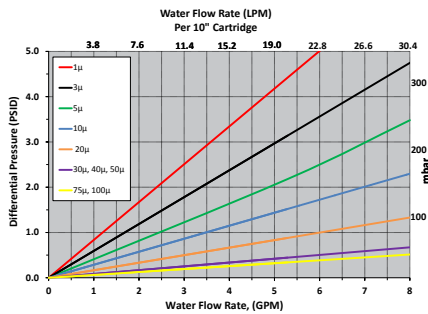

### Construction Materials

**Filtration Media** ..... Polypropylene  
**End Caps** ..... Polypropylene  
**O-Rings/Gaskets** ..... Silicone, Buna, Polyfoam, EPDM, Viton®

### Performance Specifications

**Micron Ratings:**  
1, 3, 5, 10, 20, 30, 50, 75, 100  
**Efficiencies:**  
High Performance Grade = 90%

### Maximum Recommended Operating Conditions

**Forward** ..... 35 PSID  
**Reverse** ..... 25 PSID  
**Change Out Differential Pressure** ..... 20 PSID  
**Temperature** ..... 140°F (60°C)

### Dimensions (Nominal)

**Length** ..... 9.75 to 40 inches (24.8 to 102 cm)  
**Outside Diameter** ..... 2.5 inches (6.4 cm)  
**Inside Diameter** ..... 1 inch (2.6 cm)

### Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.

### Purity

GCTB series filter cartridges are free of additives, wetting agents, binders and silicone.

### Ordering Information

GCTB	Rating (µ)	A	Length	-	End Cap Style	O-Rings/Gaskets	-	End Caps
High Performance Grade	1		9.75" (24.76cm)		2 = DOE Flat Gasket	B = Buna		Blank = Glued
	3		9.875" (25.08 cm)		3 = 222 w/Fin	E = EPDM		TB = Thermally-Bonded
	5		10" (25.4 cm)		4 = 222 w/Flat Cap	S = Silicone		CS = 316ss Compression Spring (TB ONLY)
	10		19.5" (49.53 cm)		5 = 222 w/Spring	V = Viton®		PC = Polypropylene Core
	20		20" (50.8 cm)		6 = 226 w/Flat Cap	P = Polyfoam (Gaskets)		
	30		29.25" (74.29 cm)		7 = 226 w/Fin			
	50		29.5" (74.93 cm)		8 = 226 w/Spring			
	75		30" (76.2 cm)		9 = DOE w/Spring			
	100		39" (99.1 cm)		10 = DOE w/ PP Core Extender			
			40" (101.6 cm)		20 = DOE PP Ext. w/Spring			

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required.